

# -40°C Ultra-low Temperature Freezer

*Strong Cooling · Precision Constant Temperature*



## DW-FL439

### Refrigeration System

Fluorine-free refrigerant, international brand compressor, EBM fan, ensuring fast cooling and energy saving

### Temperature Control System

High-precision microcomputer temperature control system with build-in control/alarm sensors for high/low temperature, ambient temperature etc. ensuring the safe and stable running.

### Energy Saving and Environmental Protection

Equipped with DC/DC power management module which greatly improved the energy-saving efficiency; high precision voltage control ensures the stable performance for the whole machine. Less redundant heat to eliminate the overheating safety hazard.

### Human-oriented

- High-quality steel plate structure, anti-corrosion phosphating spray, ABS drawers
- Low noise design, creating a comfortable working environment





### High-precision Temperature Control

- High-precision microcomputer temperature control system with build-in control/alarm sensors for High/low temperature, ambient temperature and evaporator temperature etc. ensuring the safe and stable running.
- 1 inch high brightness digital temperature display with 0.1°C display precision; the temperature can be set freely within the range of -20°C~40°C.



### Refrigeration System

Equipped with SECOP high-efficiency compressor and international EBM fan, ensuring energy saving and silent running.



### Alarm system

- Perfect audible and visual alarm system makes it safer for storage. Equipped with alarm functions including high/low temperature alarm, sensor failure, door ajar power failure, low battery etc.
- Specially equipped with external door handle and padlock to prevent unauthorized opening




### Human-oriented

- The interior is equipped with 7 layers of 14 ABS drawers, 2 for each layer, which is convenient for object storage
- Standard 485 port, remote alarm port
- 2 casters with brake located at the front bottom, 4 casters for the front and back


## ✓ Scope of Application

Suitable for use in blood banks, hospitals, health and disease prevention systems, research institutions, colleges & universities, the electronic industry, biological engineering, laboratories in colleges & universities, military enterprises, deep-sea fishing companies, etc.

## 🔗 Performance Data / Cooling Curve

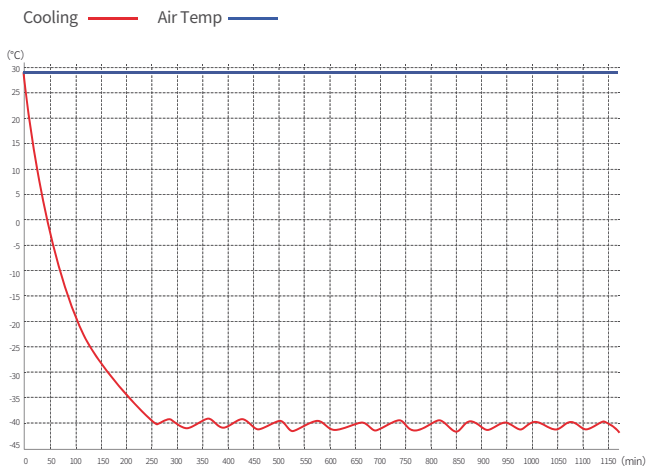

## 📐 External Dimension

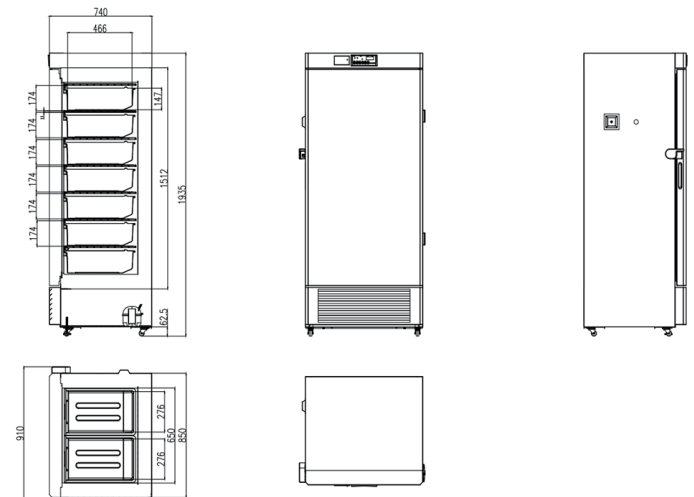

## Specification Chart

<b>-40°C Ultra-low Temperature Freezer</b>	
Model	DW-FL439
Cabinet Type	Upright
Capacity(L)	439
Internal Size(W*D*H)mm	650*547*1305
External Size(W*D*H)mm	910*755*1945
Package Size(W*D*H)mm	990*855*2070
NW/GW(Kgs)	175/200
<b>Performance</b>	
Temperature Range	-20~-40°C
Ambient Temperature	16-32°C
Cooling Performance	-40°C
Climate Class	N
Controller	Microprocessor
Display	Digital display
<b>Refrigeration</b>	
Compressor	1pc
Cooling Method	Direct cooling
Defrost Mode	Manual
Refrigerant	R507
Insulation Thickness(mm)	100
<b>Construction</b>	
External Material	Carbon steel spraying
Inner Material	Stainless steel
Drawer	14(ABS)
External Lock	Yes
Access Port	1pc. Ø 25 mm
Casters	4(2 casters with brake)
Data Logging/Interval/Recording Time	USB/Record every 10 minute / 2 years
Backup Battery	Yes
<b>Alarm</b>	
Temperature	High/Low temperature,High ambient temperature
Electrical	Power failure,Low battery
System	Sensor failure, USB datalog failure, Communication failure,Door ajar,Recorder failure,Remote alarm
<b>Electrical</b>	
Power Supply(V/HZ)	220-240~/50
Power(W)	440
Power Consumption(KWh/24h)Rated	4.68
Current(A)	3.7
<b>Accessory</b>	
Standard	RS485
Options	Printer,RS232

\*The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

\*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.